


# PATIO BLASTERS 800 SERIES

OUTDOOR • INDOOR SPEAKERS

## 70 Volts

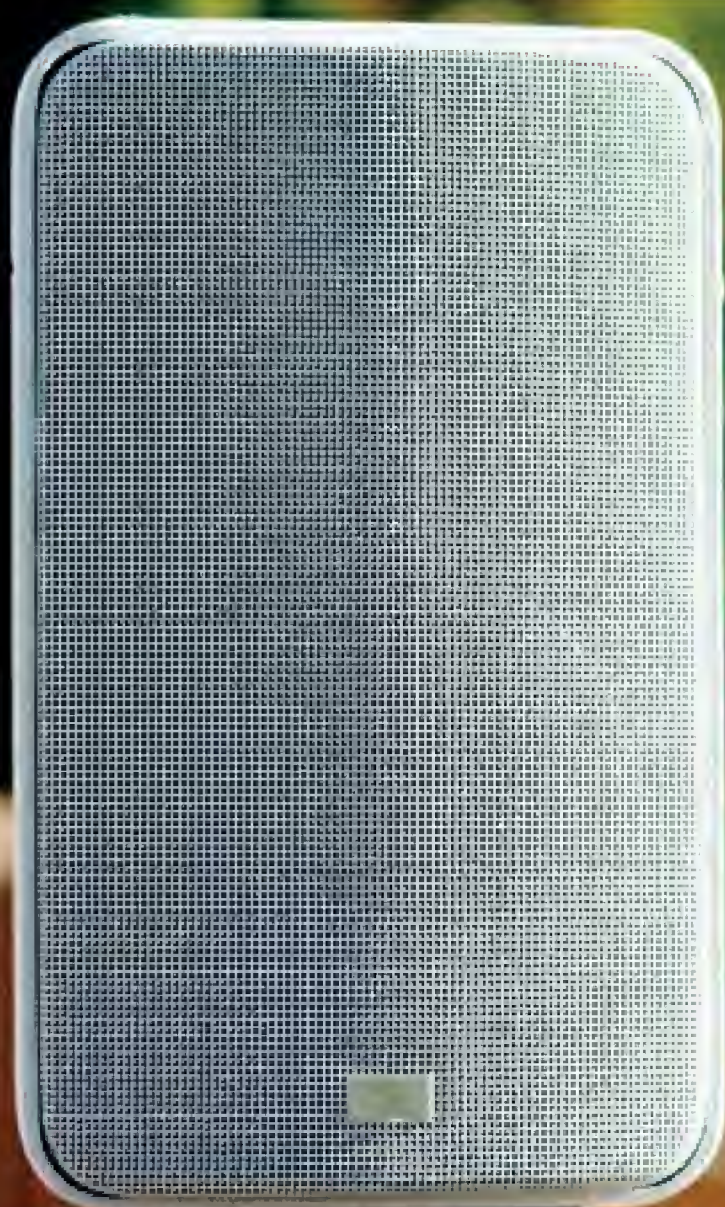

## Weatherized



- 5 1/4" Polypropylene Coated Woofer
- 2-Way
- 1" Soft Dome Tweeter
- 5 Year Warranty
- 100 Watts Max
- Unique Trapezoidal Design
- Ceiling or Wall Mount
- Aluminum Die-Cast Casing
- Tri-angle Bracket Included (30°, 45°, 90° options)
- Available in Black or White
- Available in 8 Ohms

**OWI**  
ESTABLISHED 1978



ARCHITECTS AND ENGINEERS SPECIFICATIONS/TECHNICAL DATA

# Patio Blasters 800 Series

## 70 Volts



### FEATURES

MODEL NUMBER:	T870	T874	T800
DESCRIPTION:	5 1/4" 2-way	5 1/4" 2-way	5 1/4" 2-way
OUTDOOR RATED:	YES	YES	YES
IMPEDANCE:	70 Volts	70 Volts	8 Ohms
MAX POWER:	N/A	N/A	50 Watts
NOMINAL POWER:	N/A	N/A	100 Watts
TRANSFORMER TAP:	2.5, 5, 10, 15 Watts	5, 10, 20, 40 Watts	N/A
SENSITIVITY (1W/1M)	87 dB	89 dB	89 dB
FREQUENCY RESPONSE:	80 Hz - 22 Hz	100 Hz - 22 Hz	100 Hz - 22Hz
CROSSOVER:	6 kHz	6 kHz	3.5 kHz
DISPERSION:	90°	90°	90°
WOOFER SIZE:	5 1/4"	5 1/4"	5 1/4"
WOOFER MATERIAL:	Polypropylene Coated Butyl Rubber Surround	Polypropylene Coated Butyl Rubber Surround	Polypropylene Coated Butyl Rubber Surround
TWEETER(S):	1	1	1
TWEETER SIZE:	1"	1"	1"
TWEETER MATERIAL:	Soft Dome, WaveGuide	Soft Dome, WaveGuide	Soft Dome, WaveGuide
ENCLOSURE:	Aluminum Diecast	Aluminum Diecast	Aluminum Diecast
GRILL MATERIAL:	Aluminum	Aluminum	Aluminum
DIMENSIONS (LXW/XH)	6 1/4" X 6" X 10"	6 1/4" X 6" X 10"	6 1/4" X 6" X 10"
WEIGHT:	8.90 lbs.	12.50 lbs	8.5 lbs.
TRI-ANGLE BRACKET:	Included	Included	Included
COLORS:	Black, White	Black, White	Black, White

### RECOMMENDED ACCESSORIES

SS36 - In-Ground Stainless Stake (36")

OWI1070M - Attenuator, Mono, 70V, 10W Max

OWI3570M - Attenuator, Mono, 70V, 35W Max

OWI7570M - Attenuator, Mono, 70V, 75W Max

OWI2570S - Attenuator, Stereo, 70V, 75W Max

25WPVC - Water Proof Volume Control 25 Watt, Impedance Matching, 25W RMS

72WPVC - Water Proof Volume Control 25 Watt, Impedance Matching, 72W RMS



#### OWI Incorporated

17141 Kingsview Avenue

Carson, CA 90746 USA

ph. 310.515.1900 | 800.638.1694

fx. 310.515.1606 | e. info@owi-inc.com

www.owi-inc.com